



Caritti

Sauna LED

EN

Products, used in the sauna (cover photo)

Sauna LED Set (with 6 LEDs)


Code 1532601

- Power supply (IP20)**
Dimming: DALI or push button.
Power supply to be installed in a dry place.
- Extension cable 5 m**
- Serial connection cables**
- LED 2700 K (6 pcs)**
- Jumpers (2 pcs)** (not used in this example)

Additional items:

- Expansion set with 3 LEDs 2700 K**
Code 1532602
 - Serial connection cable
 - 3 pcs of LED 2700 K
 - Jumpers (2 pcs)
- Extension cable 1.5 m**
Code 1532607
4 pcs of Extension cables 1.5 m
- Sauna Stove Lens Fibre 3.5 m**
Code 1532633
 - Optical fibre S-FLEX 3, length 3.5 m
 - Stove lens CR-09
 - LED 2700 K

If the temperature of the sauna is over +90°C or if a wood-heated stove is used, we recommend to use Cariitti optical fibre sets.

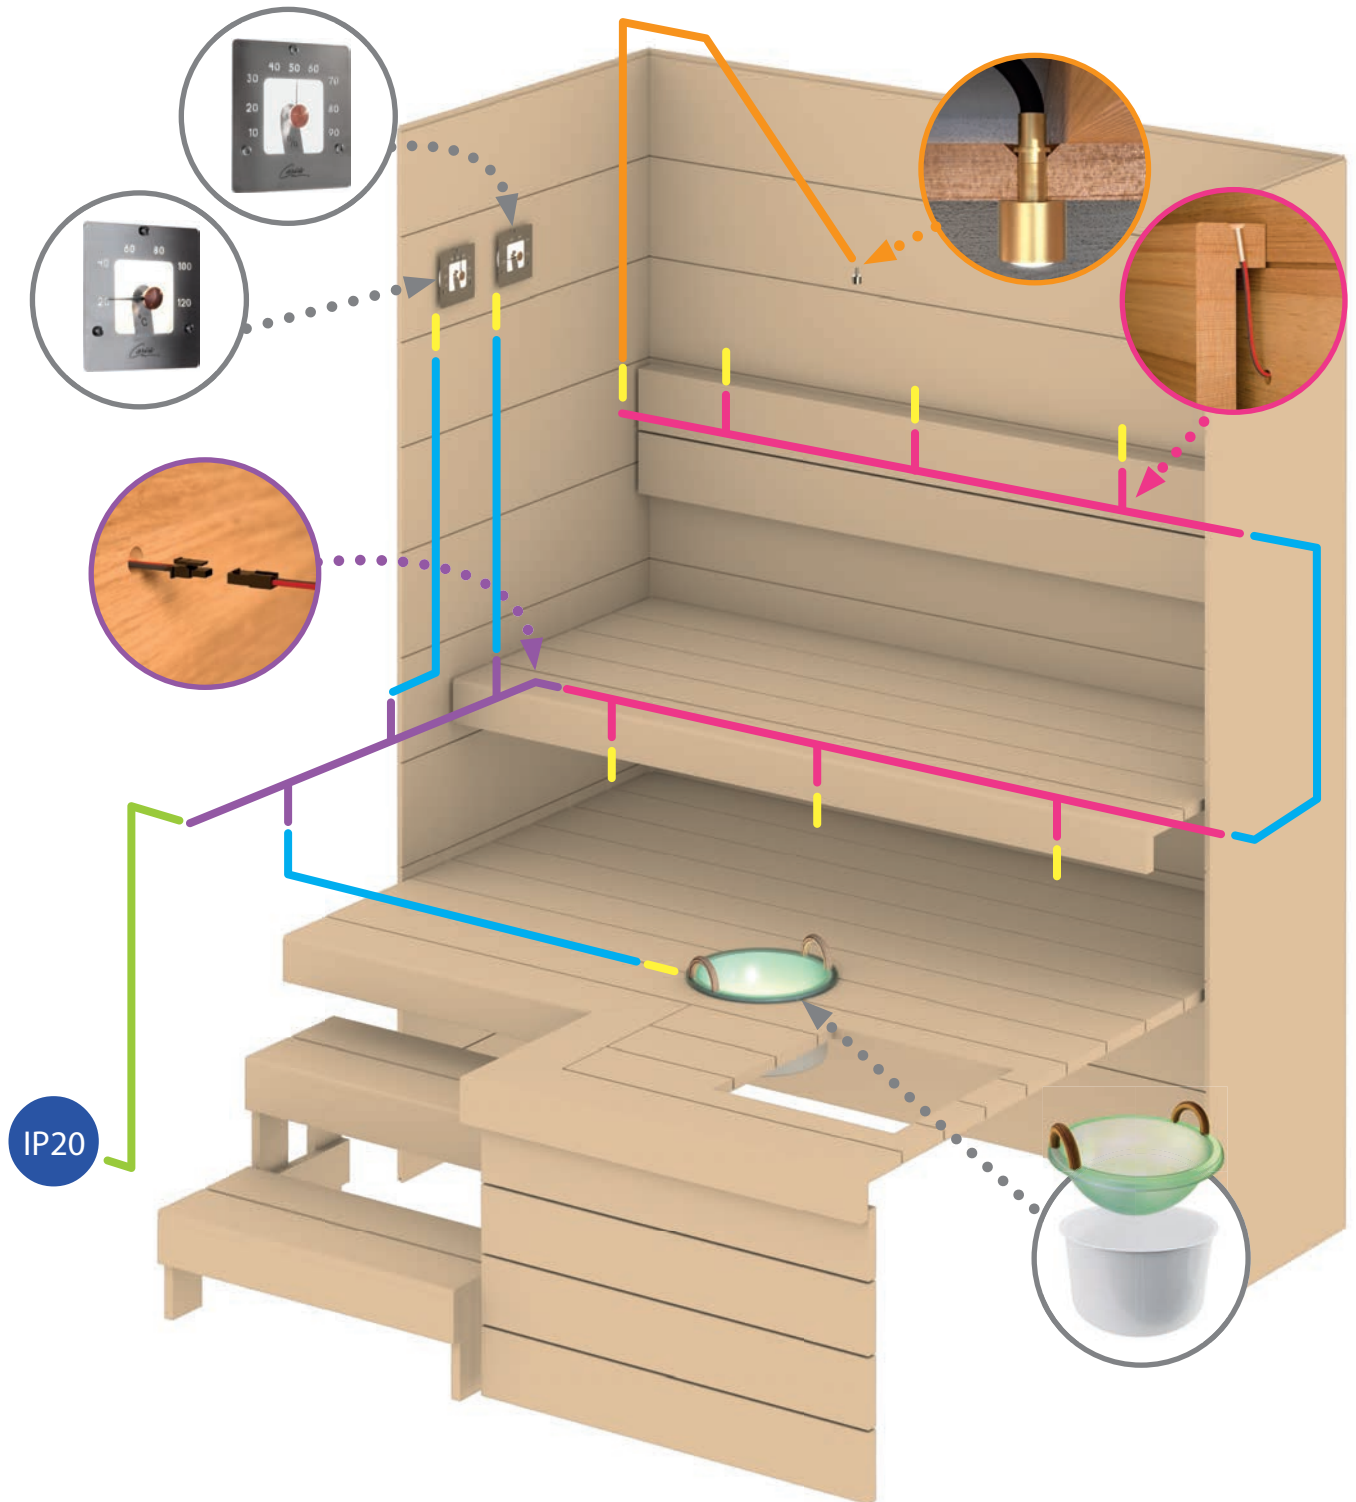

Additional Items for Sauna LED Set



Sauna Thermometer

Installed during panelling. Diameter of the thermometer is 120 mm and recess 40 mm. Height from the wall surface is 20 mm. Installed to a wall panel with three stainless steel screws (included).
Code 1545812



Sauna Hygrometer

Installed during panelling. Diameter of the hygrometer is 120 mm and recess 40 mm. Height from the wall surface is 20 mm. Installed to a wall panel with three stainless steel screws (included).
Code 1545820



Sauna Thermometer SQ

Installed during panelling. The size of the thermometer is 120x120 mm and recess 40 mm. Height from the wall surface is 20 mm. Installed to a wall panel with three stainless steel screws (included).
Code 1545828



Sauna Hygrometer SQ

Installed during panelling. The size of the hygrometer is 120x120 mm and the recess 40 mm. Height from the wall surface is 20 mm. Installed to a wall panel with three stainless steel screws (included).
Code 1545849



Thermometer-Hygrometer

A combination of a thermometer and a hygrometer for a sauna. Installed during panelling. Height 220 mm, width 207 mm, recess 40 mm. Design: Frida Lindström.
Code 1545822



Sand Timer

An illuminated sand timer with a stainless steel frame. Glass on the frame with a printed time-scale.
Dimensions: 300 x 65 mm.
Code 1545827



Torch TL-100

Torch is well suited to be installed in saunas. Made of polished stainless steel, wood and satin glass.
Dimensions: 175 x 83 x 43 mm.
Code 1545801



Lighthouse LH-100

Lighthouse is a surface mounted fixture. Made of stainless steel and satin glass.
Dimensions: 87 x 34 x 34 mm
Code 1545802



Illuminated Bowl with Wooden Handles

You can complement your sauna with an illuminated water bowl. The bowl can be illuminated with an LED or optical fibre. A practical detail that gives a wonderful finishing touch to your sauna.
Code 1545805



SCA

The round light fixture can be used under sauna seats or in the ceiling. The frame is made of black alder that can be treated with paraffin oil or tinted with sauna wax.
Diameter 150 mm (glass diameter 85 mm).
Code 1545803




Sauna Stove Lens Fibre

The diameter of the fibre is 3 mm and the length is 3.5 m. The product includes the fibre, a stove lens CR-09, an LED and an adapter. According to electrical safety standards, electrical devices may not be installed above a sauna stove. Therefore, optical fibre is the only way to provide light above a sauna stove.
Code 1532633



CR-03

6 x CR-03 Gold
Code 1532612
6 x CR-03 Chrome
Code 1532613
6 x CR-03 Black
Code 1532614



Power
IP20

Osram OTi DALI 15
150 mA
Dimming:
DALI or push button

Extension cable 5 m

Additional Items and Spare Parts:

| Code | Product | |
|---------|----------------------------------|--------------|
| 1532602 | Expansion set 2700 K with 3 LEDs | |
| 1532607 | Extension cable 1.5 m | |
| 1532608 | Extension cable 5 m | |
| 1532633 | Sauna stove lens fibre 3.5 m | |
| 1532370 | Serial connection cable | (spare part) |
| 1532373 | LED with a cable 150 mm | (spare part) |
| 1532634 | Jumper 6 pcs | (spare part) |
| 1532296 | Power supply Osram OTi DALI | (spare part) |



SAUNA LED 2700 K


Code 1532601

Serial connection cable 2.4 m

Serial connection cable 2.4 m

Jumpers 2 pcs

6 x Led with a
cable 150 mm



800 mm

800 mm



T_a + 125 °C

